



ATS Computer / Printer Interface


The optional ATS1801 Computer & Printer interface (only for ATS3000 and ATS4000) allows a 24h/24h RS232 connection to a PC running TITAN. It is also used to connect the IP interface (ATS1806) for IP reporting or connection to the management system via IP.

Specifications

Operating current	
standby	25 mA
both ports active	150 mA
Dimesions (W x H)	90 mm x 86 mm
Operating temperature	0° to +50°C
Humidity	95% non condensing

Ordering Information

ATS1801	ATS Computer and printer interface
ATS1802	ATS Printer-only interface
ATS1806	ATS Universal Interface for an Ethernet based IP connection
ATS1471	ATS keyfob
ATS8100	ATS Management software TITAN (Multilingual CD-ROM edition)
ATS8100UP	Upgrade CD for TITAN software (Multilingual CD-ROM edition)

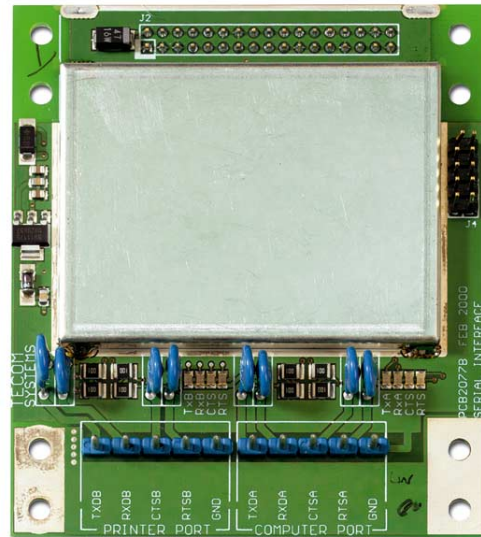

- RS232 interface for ATS control panel
- Can connect either to a PC or to a printer
- Suitable for permanent connection
- In combination with ATS1806 provide IP connectivity for ATS contro panel